



Value-Driven

TRAILERS

FASTTRAC®



The **FastTrac** brings a whole new level of value to the light-duty recreational hauler. A spirited combination of versatility and affordability, the **FastTrac** delivers on all fronts. From its unpretentious styling to its uncompromising safety, only Wells Cargo could pack so much value into an entry-level trailer. No other cargo trailer in its class offers attributes like a V-Front profile, rugged tubular steel main rails, platform lowering drop axles, 24" Starbright Stoneguard, and 3/4" DryMax® High Performance Interior Flooring. There's no doubt about it, the **FastTrac** is a quick study in getting more bang for your buck!



4' WIDE



5' WIDE



6' WIDE





WIDTHS — 4', 5', 6' & 7' WIDE MODELS



See page 6 for complete specifications & features

7' WIDE

FAST TRAC®



Ask about our
Customer Care Program

8.5' WIDE

STANDARD INTERIOR
5.2MM LAUAN SIDEWALLS & 3/4" DRYMAX® HP FLOOR



WHY DRYMAX®?

DryMax® is a high-performance wood structural panel specifically engineered for cargo trailers and offers many advantages over plywood and standard OSB products.

- Enhanced durability — built strong to withstand rugged, long-haul use
- Solid and dense, uniform thickness throughout
- Extremely rigid — less likely to bow/flex
- Engineered for long-term stability, withstands expansion/contraction due to humidity and temperature fluctuations
- Moisture resistance throughout the panel, not just on the surface
- Superior fastener-holding ability
- No knots, splits, patches or plugs
- Floor panels are fully sanded on both sides for a clean, smooth finish
- CARB compliant for low emissions
- Limited warranty

See page 7 for complete specifications & features





WIDTHS — 8.5' WIDE MODELS

Standard

.024 Prefinished White Aluminum Skin
(.030 Prefinished White Aluminum Skin on 8.5' models)



White

Popular Optional Colors

.030 Prefinished Aluminum Skin



Black



Red



Silver Frost



OPTIONAL EQUIPMENT

- Extra Height
- Sidewall Vents*
- .030 Aluminum Exterior*
- Exterior Color Upgrades
- Rear Stabilizer Jacks
- 12v Wall Switch*
- 5000 lb. Floor D-Rings*
- 500 lb. Wall Rope Rings
- Interior Spare Tire Mount
- Non-Powered Roof Vent
- Side Entry Door (5' wide models)
- Rear Ramp Door* (5', 6' & 7' wide models)
- Electric Brakes (trailers without brakes)
- 3/8" DryMax® HP Sidewall Liner
- 16" OC Crossmembers (8.5' Wide Models Only)

**Standard on 8.5' wide models*



SPECIFICATIONS — 4', 5', 6' & 7' WIDE MODELS

MODEL		FT461	FT581	FT5101	FT6101	FT6121	FT6122	FT7122	FT7142	FT7162
Body:	Length	7'5"	9'5"	11'5"	11'7"	13'7"	13'7"	13'7"	15'7"	17'7"
	Width	4'	5'	5'	6'	6'	6'	7'	7'	7'
Overall:	Length	10'1"	11'6"	13'6"	14'	16'	16'	15'8"	17'8"	19'8"
	Width	5'8"	6'8"	6'8"	7'8"	7'8"	7'8"	8'6"	8'6"	8'6"
	Height	6'6"	7'2"	7'2"	7'8"	7'8"	7'8"	7'9"	7'9"	7'9"
Interior:	Length	7'1"	9'1"	11'1"	11'3"	13'3"	13'3"	13'3"	15'3"	17'3"
	Width	3'8"	4'8"	4'8"	5'8"	5'8"	5'8"	6'8"	6'8"	6'8"
	Height	5'0"	5'5"	5'5"	6'0"	6'0"	6'0"	6'0"	6'0"	6'0"
	Platform Height	18"	18"	18"	18"	18"	19"	19"	19"	19"
Axle:	Quantity	Single	Single	Single	Single	Single	Tandem	Tandem	Tandem	Tandem
	Capacity	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.
	Type	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
	Suspension	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring
	Brakes	N/A	N/A	N/A	N/A	N/A	Electric Drum	Electric Drum	Electric Drum	Electric Drum
Tire:	Size	15"	15"	15"	15"	15"	15"	15"	15"	15"
	Wheel	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke
Hitch:	Ball Size	2"	2"	2"	2"	2"	2 5/16"	2 5/16"	2 5/16"	2 5/16"
	To Top of Ball	16"	16"	16"	16"	16"	17"	17"	17"	17"
Weight:	Hitch	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%
	Curb (lbs.)	660	935	1050	1195	1325	1740	1975	2125	2275
	GVWR (lbs.)	2980	2980	2980	2980	2980	7000	7000	7000	7000
	Avg. Payload (lbs.)	2320	2045	1930	1785	1655	5260	5025	4875	4725
Rear Door:	Style	Single Door	Single Door	Single Door	Double Doors	Double Doors	Double Doors	Double Doors	Double Doors	Double Doors
	Width	37.5"	51"	51"	63"	63"	63"	75"	75"	75"
	Height	52.25"	59.25"	59.25"	67"	67"	67"	67"	67"	67"
	Lock Style	Bar Lock	Bar Lock	Bar Lock	Cam Lock	Cam Lock	Cam Lock	Cam Lock	Cam Lock	Cam Lock
Side Door:	Width	N/A	Optional	Optional	32"	32"	32"	32"	32"	32"
	Height	N/A	Optional	Optional	66"	66"	66"	66"	66"	66"
	Lock Style	N/A	Optional	Optional	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock
	Tube Main Rails	2"x 3"	2"x 3"	2"x 3"	2"x 3"	2"x 3"	2"x 4"	2"x 4"	2"x 4"	2"x 4"
	12v End Connector	4-way	4-way	4-way	4-way	4-way	7-way	7-way	7-way	7-way
	Starbright Stoneguard	24"	24"	24"	24"	24"	24"	24"	24"	24"
	Interior Sidewall Liner	5.2 mm Lauan	5.2 mm Lauan	5.2 mm Lauan	5.2 mm Lauan	5.2 mm Lauan	5.2 mm Lauan	5.2 mm Lauan	5.2 mm Lauan	5.2 mm Lauan
	DryMax® HP Flooring	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"

STANDARD FEATURES — 4', 5', 6' & 7' WIDE MODELS

- V-Nose Profile
- 32" Side Entry Door with Bar Lock (6' & 7' wide models only)
- 12v Dome Light (1)
- 24" Starbright Stoneguard
- Ball Coupler Hitch (2" or 2 5/16")
- Top Wind Jack with Sand Pad (excluding 4' x 6' model)
- Breakaway Kit (Tandem models only)
- Safety Chains
- Entire Chassis Undercoated
- Spring Suspension Axles (4" Drop)
- 15" Radial Tires with White Spoke Wheels
- E-Z Lube Hubs
- 3/4" DryMax® High Performance Flooring
- 5.2mm Lauan Interior Sidewall Liner
- One Piece Aluminum Roof
- .024 Prefinished White Aluminum Exterior Skin
- Smooth Aluminum Jeep Fenders (Single Axle) or Smooth Aluminum Flare Fenders (Tandem Axles)
- 12v Incandescent Tail/Marker/Clearance Lights
- 24" OC Floor Crossmembers
- 16" OC Vertical Posts
- 24" OC Roof Bows
- 3-Year Limited Warranty



SPECIFICATIONS — 8.5' WIDE MODELS

MODEL		FT85162	FT85202	FT85242	FT85164	FT85204	FT85244
Body:	Length	17'10"	21'10"	25'10"	17'10"	21'10"	25'10"
	Width	8.5'	8.5'	8.5'	8.5'	8.5'	8.5'
Overall:	Length	19'6"	23'6"	27'6"	19'6"	23'6"	27'6"
	Width	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"
	Height	8'5"	8'5"	8'5"	8'6"	8'6"	8'6"
Interior:	Length	17'6"	21'6"	25'6"	17'6"	21'6"	25'6"
	Width	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"
	Height	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"
	Platform Height	19"	19"	19"	20"	20"	20"
Axle:	Quantity	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
	Type	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
	Capacity	3500 lbs.	3500 lbs.	3500 lbs.	5200 lbs.	5200 lbs.	5200 lbs.
	Suspension	Spring	Spring	Spring	Spring	Spring	Spring
	Brakes	Electric Drum	Electric Drum	Electric Drum	Electric Drum	Electric Drum	Electric Drum
Tire:	Size	15"	15"	15"	15"	15"	15"
	Wheel	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke
Hitch:	Ball Size	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"
	To Top of Ball	20"	20"	20"	21"	21"	21"
Weight:	Hitch	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%
	Curb (lbs.)	2800	3100	3500	3000	3300	3700
	GVWR (lbs.)	7000	7000	7000	10,000	10,000	10,000
	Avg. Payload (lbs.)	4200	3900	3500	7000	6700	6300
Rear Door:	Style	Ramp Door	Ramp Door	Ramp Door	Ramp Door	Ramp Door	Ramp Door
	Width	91"	91"	91"	91"	91"	91"
	Height	75"	75"	75"	75"	75"	75"
	Lock Style	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock
Side Door:	Width	32"	32"	32"	32"	32"	32"
	Height	72"	72"	72"	72"	72"	72"
	Lock Style	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock
	Tube Main Rails	2"x 6"	2"x 6"	2"x 6"	2"x 6"	2"x 6"	2"x 6"
	12v End Connector	7-way	7-way	7-way	7-way	7-way	7-way
	Starbright Stoneguard	24"	24"	24"	24"	24"	24"
	Interior Sidewall Liner	5.2 mm Lauan	5.2 mm Lauan	5.2 mm Lauan	5.2 mm Lauan	5.2 mm Lauan	5.2 mm Lauan
	DryMax® HP Flooring	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"

STANDARD FEATURES — 8.5' WIDE MODELS

- V-Nose Profile
- Rear Ramp Door with Spring Assist
- 16" Ramp Extension
- Beavertail (16' model = 32", 20' & 24' models = 48")
- 32" Side Entry Door with Bar Lock
- 12v Dome Lights (2) with Wall Switch
- 24" Starbright Stoneguard
- Ball Coupler Hitch (2 5/16")
- Top Wind Jack with Sand Pad
- Breakaway Kit
- Safety Chains
- Entire Chassis Undercoated
- Spring Suspension Axles (4" Drop)
- E-Z Lube Hub
- 15" Radial Tires with White Spoke Wheels
- 3/4" DryMax® High Performance Flooring
- 5.2mm Lauan Interior Sidewall Liner
- One Piece Aluminum Roof
- .030 Prefinished Aluminum Exterior Skin
- Smooth Aluminum Flare Fenders
- Sidewall Vents
- 5,000 lb. D-Ring with Welded Plate (4)
- 12v Incandescent Tail/Marker/Clearance Lights
- 24" OC Floor Crossmembers
- 16" OC Vertical Posts
- 24" OC Roof Bows
- 3-Year Limited Warranty

Standard Features, Specifications & Dimensions subject to change without notice.



STANDARD FEATURES — MODEL SHOWN: FT6121




Standard Features, Specifications & Dimensions subject to change without notice.



- 15" Quality Radial Tires
- White Spoke Wheels
- Smooth Aluminum Fenders
- Sealed Double Bulb DOT Approved Fender Lights



- 12v Dome Light

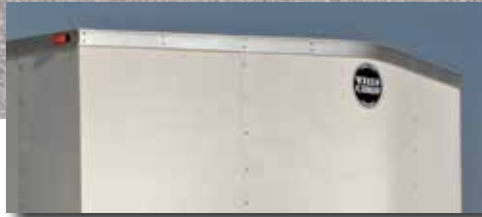

- V-Front Profile
- Extruded Aluminum Top Trim
- Sealed Double Bulb DOT Approved Clearance Lights



- Ball Coupler Hitch (2" or 2^{5/16"})
- Front Jack with Sand Pad
- 24" Starbright Stoneguard
- Safety Chains



- 5.2mm Luan Interior Sidewall Lining
- 3/4" DryMax® High Performance Flooring



BY UNIVERSAL TRAILER

©Wells Cargo, Inc. 2011 LITHO USA Form FASTTRAC 0511R0315

www.wellscargo.com

Waco, TX
McAdoo, PA

Elkhart, IN
Ogden, UT